

TTO NEAR EDGE WAX/RESIN RIBBON

Thermal Transfer Ribbon

HT-28 is a high-speed near edge wax/resin ribbon. It has strong scratch resistance, excellent graphic performance, and wide applicability of label.



HT-28

APPLICATIONS


COSMETICS PACKAGING LABELS
FOOD INFORMATION LABELS
BLOOD & IV BAG LABELS
PLASTIC FLEXIBLE PACKAGING INDUSTRIES



RECOMMENDED SUBSTRATES

Polypropylene
Polyethylene
Polyesters(Gloss)
Polyesters(Matte)

TECHNICAL SPECIFICATIONS

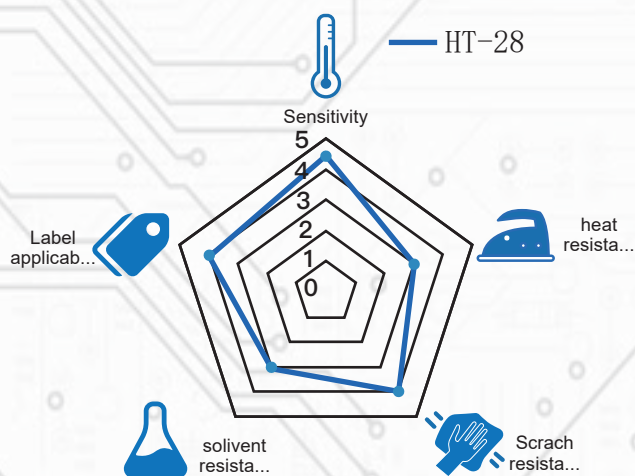

RIBBON PROPERTIES

Ink	Near edge wax/resin
Color	Black
Base Film Thickness	4.0 ± 0.3
Total Thickness	6.5 ± 0.5
Ink melting point	75°C
Printing speed	6-30IPS

CERTIFICATIONS




TECHNICAL CHARACTERISTICS

- EXCELLENT SCRATCH RESISTANCE
- EXTENSIVE LABEL APPLICABILITY
- PRINTING SPEED 30IPS
- APPLICATION OF PLASTIC FLEXIBLE PACKAGING PRODUCTS

STORAGE CONDITIONS

- 12 months recommended
- 20-85% Relative Humidity
- -5-40°C temperature

WEBSITE



Add: No.33 Ma'an Road,
Tongan Rare Earth Industrial Park,
Xiamen, Fujian, CN

MINGYOU

<http://www.mingyo.com.cn>

Tel: 86-592-7032981
E-mail: vicky-zhang@minyo-ttr.com
lily.yang@minyo-ttr.com