

TTO NEAR EDGE RESIN RIBBON

Thermal Transfer Ribbon

HL-32 is a premium resin ribbon which has strong scratch resistance, excellent printing and graphic performance, alcohol proof and gasoline resistance. It is also designed to resist UV, water, low temperature and even for hand sweat.



APPLICATIONS


COSMETICS PACKAGING LABELS
FOOD INFORMATION LABELS
BLOOD & IV BAG LABELS
PLASTIC FLEXIBLE PACKAGING INDUSTRIES



RECOMMENDED SUBSTRATES

Polypropylene
Polyethylene
Polyesters(Gloss)
Polyesters(Matte)

TECHNICAL SPECIFICATIONS

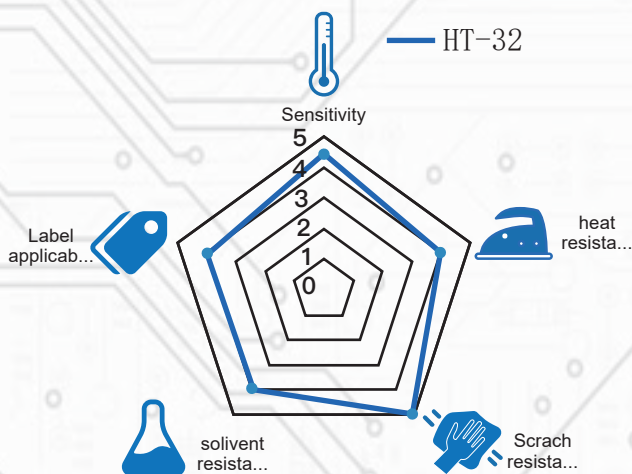

RIBBON PROPERTIES

Ink	Near edge wax/resin
Color	Black
Base Film Thickness	4.0 ± 0.3
Total Thickness	7 ± 0.5
Ink melting point	105°C
Printing speed	6-15IPS

CERTIFICATIONS




TECHNICAL CHARACTERISTICS

- EXCELLENT SCRATCH RESISTANCE
- EXTENSIVE LABEL APPLICABILITY
- CLEARPRINTING, GOOD BLACKNESS
- APPLICATION OF PLASTIC FLEXIBLE PACKAGING PRODUCTS

STORAGE CONDITIONS

- 12 months recommended
- 20-85% Relative Humidity
- -5-40°C temperature

WEBSITE

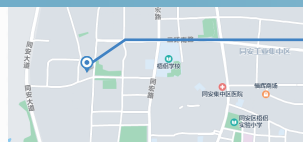

Add: No.33 Ma'an Road,
Tongan Rare Earth Industrial Park,
Xiamen, Fujian, CN



<http://www.mingyo.com.cn>

Tel: 86-592-7032981
E-mail: vicky-zhang@minyo-ttr.com
lily.yang@minyo-ttr.com